

PINK POLY GUSSETED SHROUDS

20-019-60xx

Pink polyethylene antistatic shrouds

Film construction

Antistatic polyethylene

Standard compliance

IEC 61340-5-1
94/62/EC & 2002/95/EC (ROHS directives)

Material and features

Material: Pink Polyethylene with antistatic agent
Amine free
Thickness: 80μ (+/- 10%)
Surface resistance: < 10¹¹ Ohm
Charge generation: < 100 Volts
MVTR: ≤ 2.4 g/m²/24 h
Shelf life: 2 years





Dimensions and Part Number

Part number	Dimensions
20-019-6025	1250 x (2x425) x 1850 mm
20-019-6027	1250 x (2x425) x 1600 mm
20-019-6029	579 x (2x196) x 745 mm

Options

Other models on stock or on request
Mono-layer LDPE gusseted shrouds also available

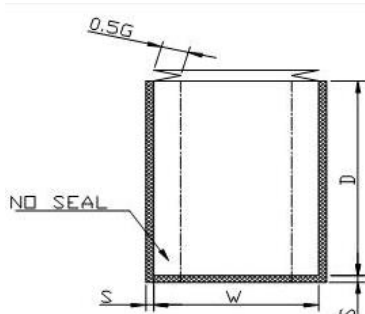

G = Gusset
W = Width
S = Seal
D = Depth